


Floodlight | XLED home 2 SL

Information copy

Dazzlingly stylish LED floodlight. XLED home 2 SL – the outdoor floodlight without sensor. Freely swivelling LED panel with new opal cover for pleasant wide-area lighting (1184 lm at 14.8 W). Swivelling range: 180° (horizontally and vertically). Cooling system of high thermal conductivity magnesium composite (HCMC). Available in white, black, white, graphite and silver.

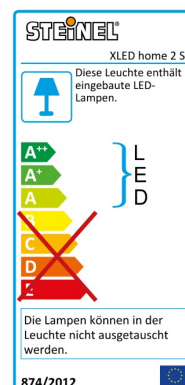

Details

14,8w

14,8 W 1184 lm

5 JAHRE
GARANTIE

5 years functional warranty



IP44

LED

30 years (Ø 4,5h / day)



4000K neutral white



networkable via cable



energy saving



Included STEINEL LED-System



HCMC cooling system



UV-protected material



Colour rendering index Ra \geq 80

Technical specifications Floodlight | XLED home 2 SL Black

European Article Number (EAN) 4007841033118

Dimensions(w x h x d): 181 x 180 x 161 mm

Voltage 230 - 240 V, 50 Hz/60 Hz

Mains power 75 mA

Power factor 0.84

Output 14,8 W

Brightness 1184 lm

Efficiency 80 lm/W

Light colour 4000 K / SDCM 3

Colour rendering Ra \geq 80

LED life expectancy 50,000 h (L70B10 to LM80)

LED cooling system HCMC (High Conductive Magnesium Composite)

Floodlight positioning range 180° horizontally, 180° vertically

Degree of protection (IP) IP44

Protection class II

Material	UV-resistant plastic
With lamp	STEINEL LED system
Temperature range	-20°C - +40°C
Lamp replaceable	No
Version	Black

Application

under porches, driveways, courtyards, gardens
ideal addition to XLED home 2