


BERTO BACKLIT

UGR<19 Square and Rectangular Backlit TPa LED Panels with Non-Dimming Driver

essentials
LED PANEL

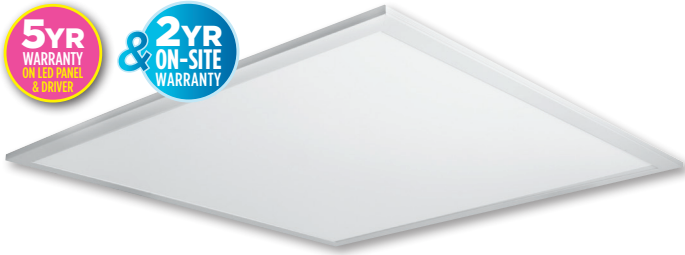


- IP40
- 5 Year warranty on panel & driver
- Surface and suspension mounting kits available separately
- Up to 100 lumen per system watt efficacy
- Perfect for shallow ceiling voids
- Quick & easy installation
- Lightweight LED panel with non discolouring TPa rated diffusers
- Suitable for use in exposed T-grid ceilings
- Ideal for general lighting use
- Long maintenance period and low lumen depreciation
- Can be used as part of a Part L building compliance



SCAN THE QR CODE FOR MORE INFORMATION



Photometric data:
Please refer to our website for up to date photometric information.

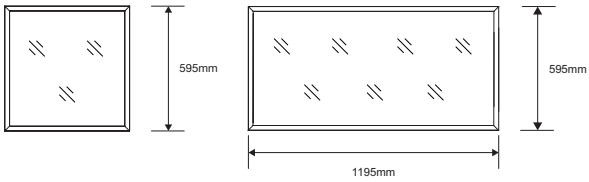

Order Code	Description	Watts	Colour Temp (K)/CRI	Lumens (lm)	Dimmable	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxWxH mm)
710675	UGR19 TPa BACKLIT (SQUARE) PANEL WITH DRIVER - 2 PACK	36W	4000K / 80	3600	N	110°	50,000	595x595x33
710676	UGR19 TPa BACKLIT (SQUARE) PANEL WITH DRIVER - 2 PACK	36W	6500K / 80	3600	N	110°	50,000	595x595x33
711081	UGR19 TPa BACKLIT (RECTANGULAR) PANEL WITH DRIVER	43W	4000K / 80	4600	N	120°	50,000	1195x595x33
711082	UGR19 TPa BACKLIT (RECTANGULAR) PANEL WITH DRIVER	43W	6500K / 80	4600	N	120°	50,000	1195x595x33

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

ACCESSORIES

<p>710502BACKLIT Emergency Kit for Backlit panels with Connectors</p>	<p>110110 50W Dimmable LED Driver</p>	<p>711473 Y Type Suspension Kit for Panel</p>	<p>710941 37W DALI 2 Dimming Driver</p>	<p>710940 Loop Through Junction Box with 3 Pin</p>	<p>710933 Surface Mounted Frame 600x600x64mm 712002 Surface Mounted Frame 1200x600x64mm</p>
--	--	--	--	---	---

710993BACKLIT - Spare Driver