

Guardian LED Bulkhead

Supplied c/w Legend and Integral Driver


406



- Ultra-slim profile LED polycarbonate bulkhead
- Supplied with self-adhesive legend
- Side and rear cable entries
- Hinged screwless gear tray for ease of installation
- Viewing distance 18 metres



AGLED/KIT
With Guardian Installed

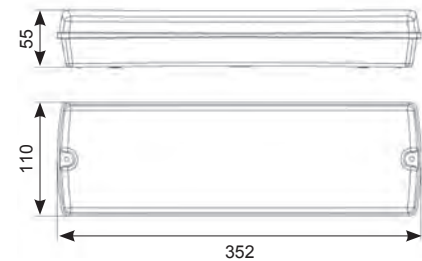

***	Escape route 2 metres wide (1 Lux minimum) *				
	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
	2.5	3.2	6.2	1.9	3.8
	4	3.6	7.3	1.9	4.2
	6	-	-	-	-

***	Open (Anti-Panic) area (0.5 Lux Minimum) **				
	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
	2.5	2.9	6	2.2	4.5
	4	3	6.1	2.4	4.8
	6	3	6	3	6

* 1 lux minimum must be used for all marked emergency escape routes, to be measured down the centre line of the escape route itself

** 0.5 lux minimum must be used for areas larger than 60m², the maximum value is to be measured across the area excluding 0.5 metre border around the edge of the room

*** Explanation of the symbols:-
Transverse - Wall
 Distance to wall from side of fitting
Transverse - Transverse
 Side to side spacing
Axial - Wall
 Distance to wall from end of fitting
Axial - Axial
 End to end spacing

Code	Lamp	Description
AGLED/3M	LED	3W Maintained / Non-Maintained
Accessories	AGLED/KIT	Semi-Recessing Kit - White
	ASBP/2	3.6V 1500mAh Replacement Ni-Cd Battery

LED Information

Total (W)	3W
Lumens Delivered	
Emergency Mode	119lm
Standard Mode	160lm
CCT	6500K
Input	230V
Hertz	50/60Hz
Operating Temp	0C° to 45C°

