


# NouLine



- High performance LED batten suitable for industrial applications and ancillary areas
- Selectable CCT between 3000K, 4000K and 6500K
- High efficiency up to 140lm/W
- Power selectable; offering high and low output option in each length
- Excellent light uniformity through high transmittance polycarbonate diffuser
- Instant light output with unlimited switching
- Push fit terminals for ease and speed of installation
- Multiple conduit entry and BESA fixing points
- Non-dimmable

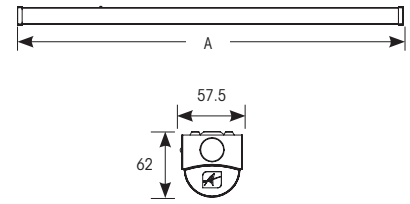

Multiple install options, either BESA or conduit box mounted at the top and conduit end entry points

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220/240V	50/60Hz	-20°C to 30°C	L70 54,000	80	6	110/150°	1	IP20

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	A
<b>ANOU4/2</b>	CCT Selectable - 1 x 1200mm	19W/38W		2600lm - 5100lm (4000K)		1170mm
<b>ANOU5/2</b>	CCT Selectable - 1 x 1500mm	25W/50W	3000K/4000K/6500K	3600lm - 6900lm (4000K)	140lm/W	1470mm
<b>ANOU6/2</b>	CCT Selectable - 1 x 1800mm	35W/50W		4900lm - 6900lm (4000K)		1770mm

CODE (OPTIONS)	DESCRIPTION	CODE (OPTIONS)	DESCRIPTION
<b>/SM3</b>	Self-Test Emergency	<b>/MWS</b>	Integral Microwave Sensor

