





	INSTALLATION CONTACTORS (INC)					
	20	25	40	63		
	INC202	INC254	INC402	INC634		
RATING (Ith) A						
PART NUMBER	INC202	INC254	INC402	INC634		
GTIN-13	5060523520473	5060523520480	5060523520497	5060523520503		
INNER CARTON QUANTITY	1	1	1	1		
OUTER CARTON QUANTITY	6	4	4	3		
NUMBER OF POLES (N/O)	2	4	2	4		
WEIGHT (1PC) Kg	0.146	0.235	0.26	0.36		
DEVICE WIDTH (mm)	18	36	36	54		
HEAT DISSIPATION SPACERS (add 18mm to module width)	2x9mm(18mm)	2x9mm(18mm)	2x9mm(18mm)	2x9mm(18mm)		
AC-7a (A)	20	40	25	63		
AC-7b (A)	6.4	15	8.5	20		
Ith (thermal) A	20	40	25	63		
Holding VA	2.7	4.6	4.6	6.5		
Inrush VA	9.2	34	34	53		
Dissipated W	1.2	1.6	1.6	2.1		
TORQUE SETTING (CONTROL CIRCUIT) A1 A2	0.8Nm	0.8Nm	0.8Nm	0.8Nm		
TORQUE SETTING (POWER CIRCUIT)	0.8Nm	3.5Nm	0.8Nm	3.5Nm		
MAXIMUM CABLE CAPACITY (mm ²)	4	16	4	16		
RATED VOLTAGE (Un/AC)	230V					
FREQUENCY (Hz)	50/60					
PROTECTION DEGREE (IP)	20					
MOUNTING	35mm DIN RAIL					
MATERIAL	PA6 NYLON					
ORIGIN OF MANUFACTURE	CHINA					




AC-7a: Small Inductive loads in domestic dwellings such as TV, mixers, drills, etc

AC-7b: Rotating machines in domestic dwellings such as fans, central vacuum cleaners, washing machines etc

DIMENSIONS

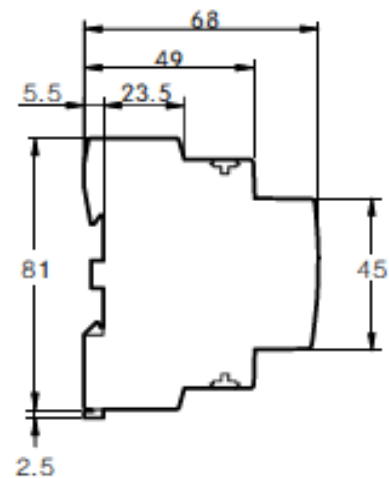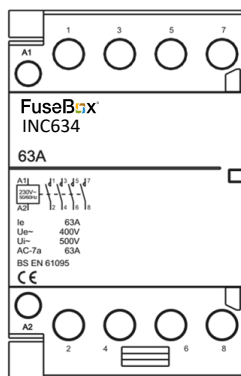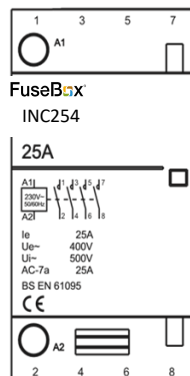

INSTALLATION

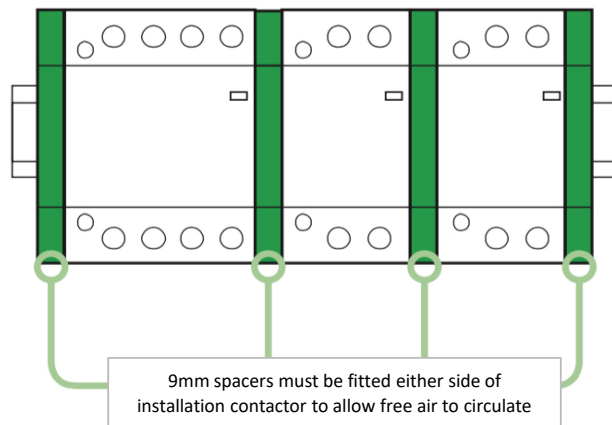

9mm spacers must be fitted either side of installation contactor to allow free air to circulate

