

Upgrade
May, 2025

Mulu 2 in 1

Dual-mode Standard & Self-test
IP65 LED emergency exit sign bulkhead

Dual test mode

STD
ATS

Duration test interval

26WK
52WK


Battery warranty

5
YEAR

Temp. Control



- Select standard or self-test mode via the internal dual-mode DIP switch
- To set the duration test interval, press the push switch twice
 - Automatic Self-test conforming to BS-EN-62034
 - All legends included
 - Maintained and non-maintained option
 - 20mm Conduit entry
- IP65 and IK10 (vandal resistant) for internal & external uses
- Dual entry push-wire terminal block for easy loop-in loop-out wiring
- BESA box fitting points



Setting the test mode with the internal DIP switch



Double-press to change duration test interval



▲ Rotatable arrow sign



**Installation
Fault Warning**




**Standard
Emergency**



**Self-test (ATS)
Emergency**

LED Indicator

See page 60 for more information on the LED indicator reporting patterns

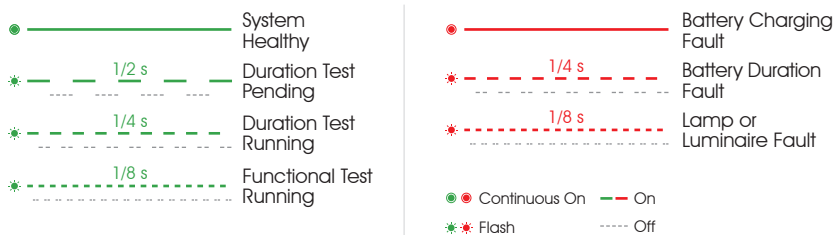

Order Code	Input Power (max)	Emergency Output Power	CCT	Lumen
MUL0105/SST	5W	1.5W	6500K	80lm
MUL0105-BLK/SST	5W	1.5W	6500K	60lm

Battery

Order Code	Type	Capacity	Voltage
BATS18LFP1	LiFePO4	1800mAh	3.2V


- 5** 5 Years Product Warranty
- 2** 2 Years On-Site Warranty
- 1000V** Surge Protection



Black finish

General Specification

Input Voltage	220-240Vac
Input Current (max)	50/60Hz
Lifetime	40mA
Emergency Conversion Time	50,000h
Emergency Operation Time	<1s
Charging Time	3h
Ambient Temp	24h
Housing	0°C to 50°C
Diffuser	ABS
	Polycarbonate



GP125
Spacing table

Order Code

MUL0105/SST
MUL0105-BLK/SST

Dimensions

